

124mm

KONQUEST

DIGITAL THERMOMETER

Model:KDT-1201

INSTRUCTION MANUAL

Warning :

- ▲ Read instructions thoroughly before using digital thermometer.
- ▲ Choking Hazard: Thermometer cap and battery may be fatal if swallowed. Do not allow children to use this device without parental supervision.
- ▲ Do not use thermometer in ear. Designed use is for oral, rectal, and armpit (axilla) readings only.
- ▲ Do not place thermometer battery near extreme heat as it may explode.
- ▲ Note: Use of the probe cover may result in a 0.2°F(0.1°C) discrepancy from actual temperature.
- ▲ It is recommended the performance should be checked every two years.
- ▲ Remove battery from the device when not in operation for a long time.
- ▲ The use of temperature readings for self-diagnosis is dangerous. Consult your doctor for the interpretation of results. Self-diagnosis may lead to the worsening of existing disease conditions.
- ▲ Do not attempt measurements when the thermometer is wet as inaccurate readings may result.
- ▲ Do not bite the thermometer. Doing so may lead to breakage and/or injury.
- ▲ Do not attempt to disassemble or repair the thermometer. Doing so may result in inaccurate readings.
- ▲ After each use, disinfect the thermometer especially in case the device is used by more than one person.
- ▲ Do not force the thermometer into the rectum. Stop insertion and abort the measurement when pain is present. Failure to do so may lead to injury.
- ▲ Do not use thermometer orally after being used rectally.
- ▲ For children who are two years old or younger, please do not use the devices orally.

PLEASE READ CAREFULLY BEFORE USING


This digital thermometer provides a quick and highly accurate reading of an individual's body temperature. The digital thermometer is intended to measure the human body's temperature in regular mode orally, rectally or under the arm, and the device is reusable for clinical or home use on people of all ages. To better understand its functions and to provide years of dependable results, please read all instructions first.

This appliance conforms to the following standards:

ASTM E1112 Standard Specification for Electronic Thermometer for Intermittent Determination of Patient Temperature,
 ISO 80601-2-56 Medical electrical equipment —Part 2-56:Particular requirements for basic safety and essential performance of clinical thermometers for body temperature measurement,
 IEC 60601-1-11 Medical electrical equipment —Part 1-11: General requirements for basic safety and essential performance —Collateral Standard: Requirements for medical electrical equipment and medical electrical systems used in the home healthcare environment and complies with the requirements of IEC 60601-1-2(EMC), AAMI/ANSI ES60601-1 (Safety) standards. And the manufacturer is ISO 13485 certified and FDA 510(k)K110776.

CONTENTS

1 Thermometer, 1 Owner's Manual, 1 Storage Case

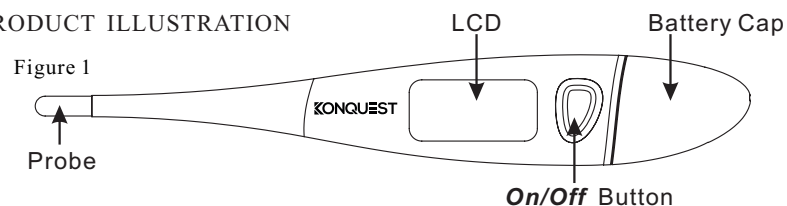PRODUCT ILLUSTRATION**PRECAUTION**

- *The performance of the device may be degraded should one or more of the following occur:
 - Operation outside the manufacturer's stated temperature and humidity range.
 - Storage outside the manufacturer's stated temperature and humidity range.
 - Mechanical shock (for example, drop test).
 - Patient temperature is below ambient temperature.



*Portable and mobile RF communications can affect the device. The device needs special pre-cautions regarding EMC according to the EMC information provided in the accompany documents.

SYMBOL EXPLANATION

	Direct Current		Batch code
	Type BF Applied Part		Manufacturer
	Consult Accompanying Documents		

SPECIFICATIONS

Type:	Digital Thermometer (Not Predictive)
Measure Range:	90.0°F-109.9°F(32.0°C - 42.9°C) (°C/°F chosen by manufacturer)
Accuracy:	±0.2°F(±0.1°C) during 95.9°F~107.6°F(35.5°C~42.0°C) at 64.4°F~82.4°F(18°C~28°C) ambient operating range ±0.4°F(±0.2°C) for other measuring and ambient operating range Procedures for determining the accuracy of the thermometer are available upon request.
Operating mode:	Direct Mode
Display:	Liquid crystal display, 3 1/2 digits
Memory:	For storing the last measured value
Battery:	One 1.5 V DC. button battery (size LR41 or SR41, UCC 392)
Battery life:	Approx 200 hours
Dimension:	13.9cm x 2.2cm x 1.3cm (L x W x H)
Weight:	Approx. 11 grams including battery
Ambient operating range:	Temperature: 41°F ~ 104°F(5°C ~ 40°C) Relative humidity: 15%~95%RH
Storage and transportation condition:	Temperature: -4°F ~ 131°F(-20°C~55°C) Relative humidity: 15%~95%RH
Ingress Protection Rating:	IP 27
Classification:	Type BF

°F/°C SWITCHABLE

Temperature readings are available in the Fahrenheit or Celsius scale (°F/°C; located in the upper right corner of LCD.) With the unit off, press and hold the *On/Off* Button for approximately 4 seconds to change the current setting.

DIRECTIONS

1. Press the *On/Off* Button next to LCD display. A tone will sound as the screen shows **1888**, followed by last recorded temperature. After showing the self-test temperature, the thermometer is now in the testing mode.

*Note: If the measured temperature is less than 90°F or 32°C, the LCD will display Lo, if the measured temperature is higher than 109.9°F or 42.9°C, the LCD will display Hi.

2. Position thermometer in desired location (mouth, rectum, or armpit.)

a) **Oral Use:** Place thermometer under tongue as indicated by "√" position shown in Figure 2. Close your mouth and breathe evenly through the nose to prevent the measurement from being influenced by inhaled/exhaled air. Normal temperature between 96.3°F and 99.1°F (35.7 °C and 37.3 °C)




Figure 2

b) **Rectal Use:** Lubricate silver probe tip with petroleum jelly for easy insertion. Gently insert sensor approximately 1cm (less than 1/2 ") into rectum. Normal temperature between 97.2°F and 99.9°F (36.2 °C and 37.7 °C).

c) **Armpit Use:** Wipe armpit dry. Place probe in armpit and keep arm pressed firmly at side. From a medical viewpoint, this method will always provide inaccurate readings, and should not be used if precise measurements are required. Normal temperature between 95.4°F and 98.1°F (35.2 °C and 36.7 °C).

3. The degree sign flashes throughout the testing process. When flashing stops an alarm will beep for approximately 10 seconds. The measured reading will appear on the LCD simultaneously. The minimum measurement time until the signaling tone (beep) must be maintained without exception. The measurement continues even after the buzzer notification. The displayed temperature will not change

*Note: Normally the buzzes are **Bi-Bi-Bi-Bi-**; Alarm beeps more rapidly when temperature reaches 100°F (37.8°C) or higher, and the buzzes are **Bi-Bi-Bi-----Bi-Bi-Bi-----Bi-Bi-Bi**

4. To prolong battery life, press the *On/Off* Button to turn unit off after testing is complete. If no action is taken, the unit will automatically shut off after around 10 minutes.
5. Store the thermometer in its protective case.

BATTERY REPLACEMENT

1. Replace battery when "**!**" appears in the lower right corner of LCD display.
2. Pull battery cover off as shown in Figure 3.
3. Gently pull out plastic circuit board with battery chamber approximately 1 cm (slightly less than 1/2"). (See Figure 4)
4. Use pointed object such as a pen to remove old battery. Discard battery lawfully. Replace with new 1.5V DC button type LR41 or SR41, UCC392, or equivalent. Be sure battery is installed with "+" polarity facing up. (See Figure 5)
5. Slide battery chamber back into place and attach cover.



Figure 3




Figure 4




Figure 5

CLEANING AND DISINFECTION

wipe the thermometer with a soft clean cloth.

For stubborn stains, wipe the thermometer with a cloth that has been dampened with water or a neutral detergent solution and then wring thoroughly. Finish by wiping with a soft dry cloth.

For disinfection, 70% Ethanol or Isopropyl alcohol can be used.

Observe the following to prevent damage to the thermometer.

- Do not use benzene, thinner, gasoline or other strong solvents to clean the thermometer.
- Do not attempt to disinfect the sensing section (tip) of the thermometer by immersing in alcohol or in hot water (water over 122°F(50°C)).
- Do not use ultrasonic washing to clean the thermometer.

FCC INFORMATION

Caution: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.

*Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the distance between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

LIMITED WARRANTY

The thermometer is guaranteed for one year from the date of purchase. If the thermometer does not function properly due to defective components or poor workmanship, we will repair or replace it free of charge. All components are covered by this warranty excluding the battery. The warranty does not cover damages to your thermometer due to improper handling. To obtain warranty service, an original or copy of the sales receipt from the original retailer is required.

Disposal of this product and used batteries should be carried out in accordance with the national regulations for the disposal of electronic products.

Manufactured for Konquest Group Inc,
 Email: info@konquestusa.com
 www.konquestusa.com
 Telephone: +1-833-KONQUEST (+1-833-566-7837)

Made in China

Document No. KDT-1201-V1
 Version: English
 Date of Issue: 2017.11

**KONQUEST**

280mm

124mm

Electromagnetic Compatibility Information

The device satisfies the EMC requirements of the international standard IEC 60601-1-2. The requirements are satisfied under the conditions described in the table below. The device is an electrical medical product and is subject to special precautionary measures with regard to EMC which must be published in the instructions for use. Portable and mobile HF communications equipment can affect the device. Use of the unit in conjunction with non-approved accessories can affect the device negatively and alter the electromagnetic compatibility. The device should not be used directly adjacent to or between other electrical equipment.

Table 1

Guidance and declaration of manufacturer-electromagnetic emissions		
The device is intended for use in the electromagnetic environment specified below. The customer or the user of the device should assure that it is used in such an environment.		
Emissions test	Compliance	Electromagnetic environment-guidance
RF emissions CISPR 11	Group 1	The device uses RF energy only for its internal function. Therefore, its emissions are very low and are not likely to cause any interference in nearby electronic equipment.
RF emissions CISPR 11	Class B	The device is suitable for use in all establishments, including domestic establishments and those directly connected to the public low-voltage power supply network that supplies buildings used for domestic purposes.
Harmonic emissions IEC 61000-3-2	N/A	
Voltage fluctuations/ flicker emissions IEC 61000-3-3	N/A	

Table 2

Guidance and declaration of manufacturer-electromagnetic immunity			
The device is intended for use in the electromagnetic environment specified below. The customer or the user of the device should assure that it is used in such an environment.			
IMMUNITY test	IEC 60601 test level	Compliance level	Electromagnetic environment guidance
Electrostatic discharge (ESD) IEC 61000-4-2	± 6 kV contact ± 8 kV air	± 6 kV contact ± 8 kV air	Floors should be wood, concrete or ceramic tile. If floors are covered with synthetic material, the relative humidity should be at least 30 %.
Electrostatic transient/burst IEC 61000-4-4	± 2 kV for power supply lines ± 1 kV for input/output lines	N/A	
Surge IEC 61000-4-5	± 1 kV differential mode ± 2 kV common mode	N/A	
Voltage dips, short interruptions and voltage variations on power supply input lines IEC 61000-4-11	< 5% UT (>95% dip in UT) for 0.5 cycle 40% UT (60% dip in UT) for 5 cycle 70% UT (30% dip in UT) for 25 cycle <5% UT (>95% dip in UT) for 5 secondary	N/A	
Power frequency (50/60 Hz) magnetic field IEC 61000-4-8	3 A/m	3 A/m	Power frequency magnetic fields should be at levels characteristic of a typical location in a typical commercial or hospital environment.

Table 3


Guidance and declaration of manufacturer-electromagnetic immunity			
The device is intended for use in the electromagnetic environment specified below. The customer or the user of the device should assure that it is used in such an environment.			
IMMUNITY test	IEC 60601 test level	Compliance level	Electromagnetic environment guidance
Conducted RF IEC 61000-4-6	3 Vrms 150 kHz to 80 Mhz	N/A	Portable and mobile RF communications equipment should be used no closer to any part of the device, including cables, than the recommended separation distance calculated from the equation applicable to the frequency of the transmitter.
Radiated RF IEC 61000-4-3	3 V/m 80 MHz to 2.5 Ghz	3 V/m	Recommended separation distance $d = \left[\frac{3.5}{E_1} \right] \sqrt{P}$ 80 MHz to 800 MHz $d = \left[\frac{7}{E_1} \right] \sqrt{P}$ 800 MHz to 2.5 Ghz where P is the maximum output power rating of the transmitter in watts (W) according to the transmitter manufacturer and d is the recommended separation distance in metres (m). Field strengths from fixed RF transmitters, as determined by an electromagnetic site survey, a should be less than the compliance level in each frequency range. Interference may occur in the vicinity of equipment marked with the following symbol: 

Table 4

Recommended separation distances between portable and mobile RF communications equipment and the device	
The device is intended for use in an electromagnetic environment in which radiated therefore disturbances are controlled. The customer or the user of the device can help prevent electromagnetic interference by maintaining a minimum distance between portable and mobile RF communications equipment (transmitters) and the device as recommended below, according to the maximum output power of the communications equipment.	

Rated maximum output power of transmitter W	Separation distance according to frequency of transmitter m	
	80 MHz to 800 MHz $d = \left[\frac{3.5}{E_1} \right] \sqrt{P}$	800 MHz to 2.5 GHz $d = \left[\frac{7}{E_1} \right] \sqrt{P}$
0.01	0.12	0.23
0.1	0.38	0.73
1	1.2	2.3
10	3.8	7.3
100	12	23

For transmitters rated at a maximum output power not listed above, the recommended separation distance d in metres (m) can be estimated using the equation applicable to the frequency of the transmitter, where P is the maximum output power rating of the transmitter in watts (W) according to the transmitter manufacturer.

NOTE1 At 80 MHz and 800 MHz, the separation distance for the higher frequency range applies.

NOTE2 These guidelines may not apply in all situations. Electromagnetic propagation is affected by absorption and reflection from structures, objects and people.

254mm